DATASHEET

IE4 THREE PHASES MOTOR



GENERAL DATA

Motor Code:	**MS4-100L2-8**
Power (kW):	**1.1**
Frame Size:	**100**
Housing Material:	**Aluminium**
Net Weight (kg):	**26**
Insulation Class:	**F**
Protection Degree:	**IP55**
Service Duty:	**S1**
Efficiency Class:	**IE4**
Cooling Method:	**IC411**
Standard:	**IEC 60034**
Bearing Types:	**6206 ZZ**
Noise Level (dB):	**59**
Moment of Inertia (kg*m2):	**0.011561**
Ambient Temp.:	**-15C to +40C**
Altitude:	**1000m above sea level**

ELECTRICAL DATA

Power (kW):			**1.1**
Frequency (Hz):			**50HZ**
Speed (RPM):			**710.0**
Eff% (@400V)	**100%: 80.8**	**75%: 80.7**	**50%: 78.1**
Power Factor (Cos PHI):			**0.64**
Tst/Tn:			**2.3**
Tmax/Tn:			**2.6**
Tmin/Tn:			**1.8**
Ist/In:			**4.5**
Moment of Inertia (kg*m2):			**0.011561**


Current (A)		
220V	380V	660V
5.58	**3.23**	**1.86**

Current (A)		
230V	400V	690V
5.34	**3.07**	**1.78**


Current (A)		
240V	415V	720V
5.12	**2.96**	**1.71**

MECHANICAL DATA


IM B3

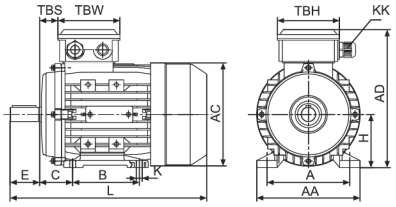


IM B5

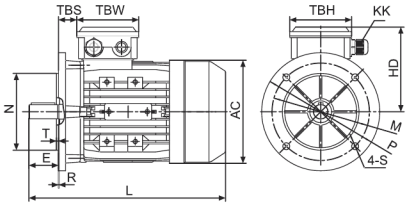


IM B14

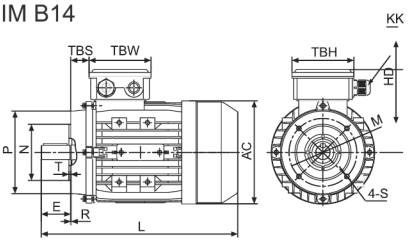


IM B34

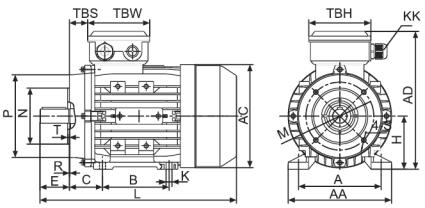

IM B35

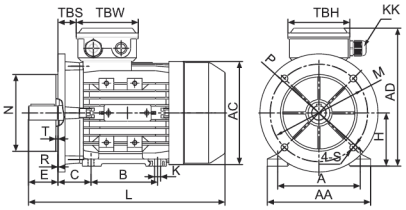



Frame	Foot Mounting					Shaft							General									
	H	A	B	C	K	D	E	F	G	SS	XX	ZZ	AA	AD	HD	AC	L	LCCL	KK	TBS	TBW	TBH
100	100.0	160	140	63.0	12X15	Ø28	60.0	8.0	24.0	M10	22.0	30.0	198.0	252.0	152.0	Ø205	369(387)	425(443)	2-M20X1.5	26.0	105.0	105.0