DATASHEET

IE4 THREE PHASES MOTOR



GENERAL DATA

Motor Code:	**MS4-632-4**
Power (kW):	**0.18**
Frame Size:	**63**
Housing Material:	**Aluminium**
Net Weight (kg):	**4.8**
Insulation Class:	**F**
Protection Degree:	**IP55**
Service Duty:	**S1**
Efficiency Class:	**IE4**
Cooling Method:	**IC411**
Standard:	**IEC 60034**
Bearing Types:	**6201 ZZ**
Noise Level (dB):	**52**
Moment of Inertia (kg*m2):	**0.00043**
Ambient Temp.:	**-15C to +40C**
Altitude:	**1000m above sea level**

ELECTRICAL DATA

Power (kW):			**0.18**
Frequency (Hz):			**50HZ**
Speed (RPM):			**1400.0**
Eff% (@400V)	**100%: 74.7**	**75%: 74.1**	**50%: 69.7**
Power Factor (Cos PHI):			**0.67**
Tst/Tn:			**2.6**
Tmax/Tn:			**2.8**
Tmin/Tn:			**2.4**
Ist/In:			**4.3**
Moment of Inertia (kg*m2):			**0.00043**


Current (A)		
220V	380V	660V
0.94	**0.55**	**0.31**

Current (A)		
230V	400V	690V
0.9	**0.52**	**0.3**


Current (A)		
240V	415V	720V
0.87	**0.5**	**0.29**

MECHANICAL DATA


IM B3

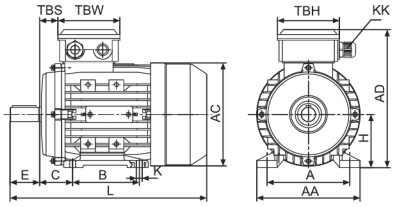


IM B5

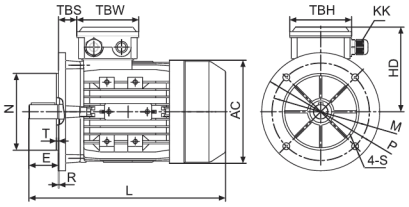


IM B14

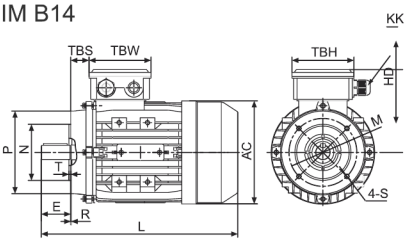


IM B34

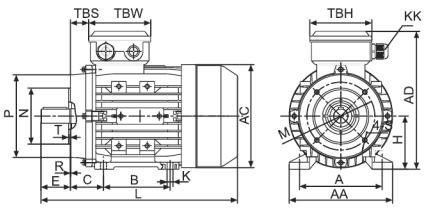

IM B35

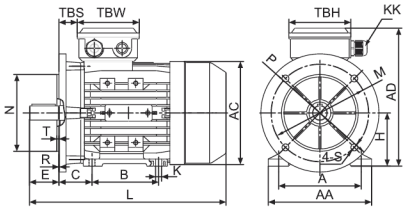



Frame	Foot Mounting					Shaft							General									
	H	A	B	C	K	D	E	F	G	SS	XX	ZZ	AA	AD	HD	AC	L	LCCL	KK	TBS	TBW	TBH
63	63.0	100	80	40.0	7X10	Ø11	23.0	4.0	8.5	M4	10.0	14.0	120.0	171.0	108.0	Ø130	220	258	1-M16X1.5	14.0	94.0	94.0