

DATASHEET
Single Phase Induction Motor – Capacitor Start & Run
VEL1ML90S_4_1,1B3

GENERAL INFORMATION

Item	Specification
Rated Power	1.1 kW
Poles	4
Speed	1400 rpm
Voltage	220 V
Frequency	50 Hz
Current	7.8 A
cos φ	0.92
Efficiency	72%
Frame	90S
Mounting	IM B3
Protection	IP54

ELECTRICAL DATA (REAL TEST DATA)

V	Load %	Current (A)	Speed (rpm)	Output (W)	cos φ	Efficiency (%)	Hz
220	50	4.8	1450	550	0.86	67	50
220	75	6.3	1430	825	0.90	70	50
220	100	7.8	1400	1100	0.92	72	50

CAPACITOR DATA


Item	Value
Run Capacitor	25 µF
Start Capacitor	120 µF
Voltage	450 V

VEL Motor reserves the right to change specifications without prior notice.

sales@velmotor.com.tr



MECHANICAL DRAWING – IM B3

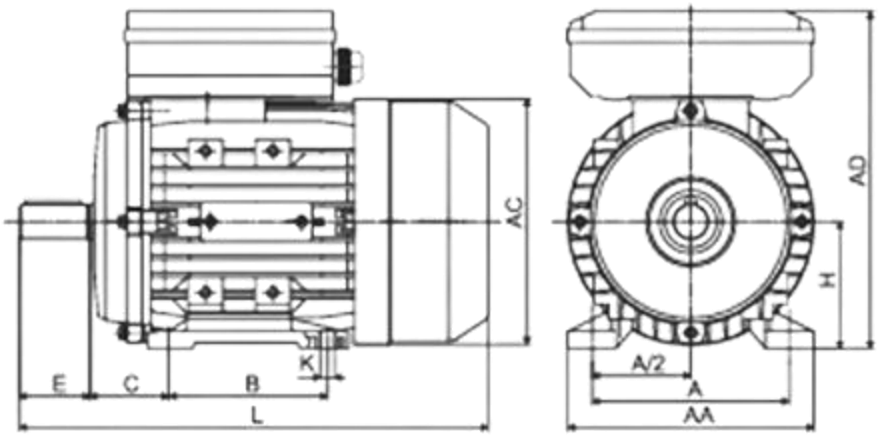

MECHANICAL DIMENSIONS (IEC 60072-1)

Dimension	mm
H	90
A	140
B	125
C	56
D	24
E	50
F	8
G	20
K	10
L	350

VEL Motor reserves the right to change specifications without prior notice.

sales@velmotor.com.tr